





Wall Application

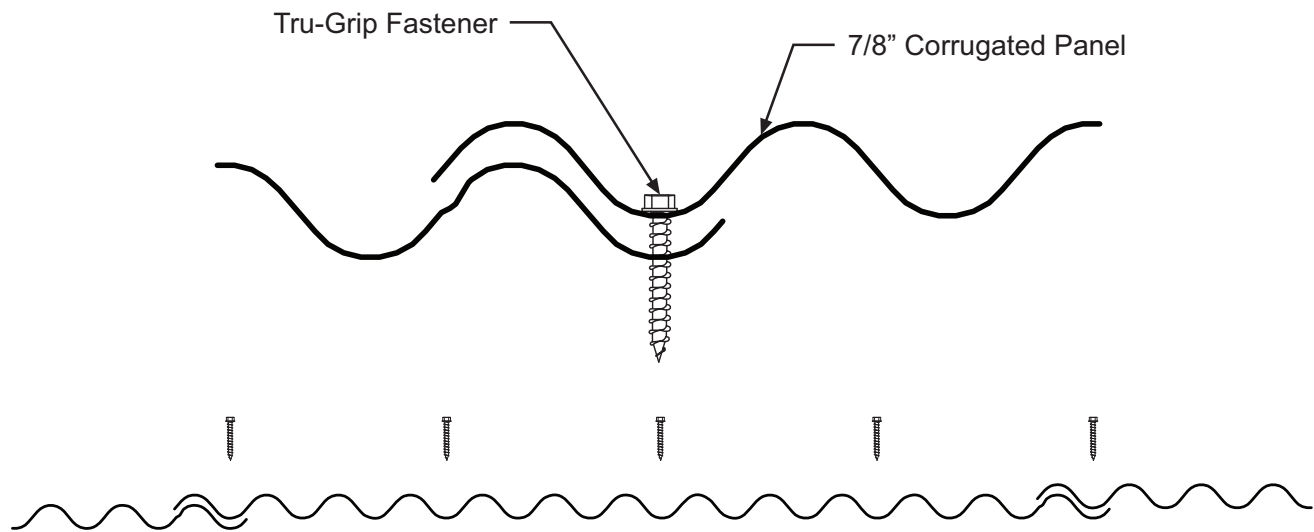

Roof Application

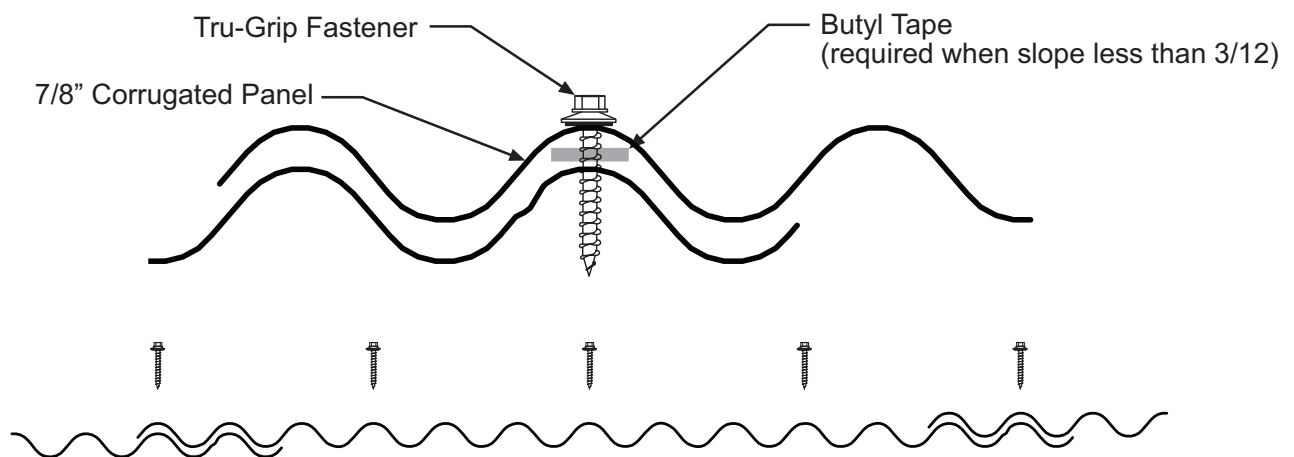

Notes:

- It is recommended panels should be fastened every 2' on center for roofs and walls.
- 2" fastener required for roof application.
- Butyl tape on side laps is required when roof slope is below 3/12.
- Butyl tape not required for wall application.